


REC'D 17 JAN 2005

WIPO

PCT

PA 1257601

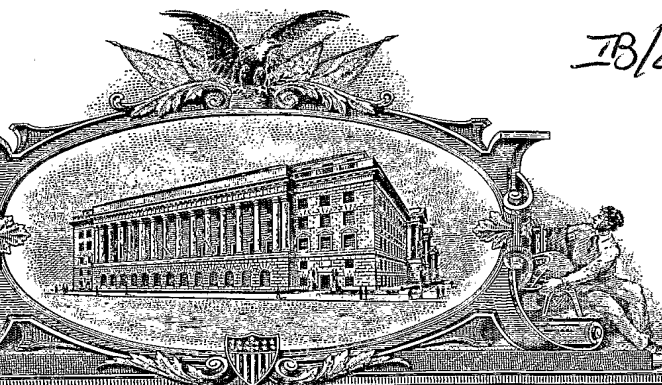

# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**December 13, 2004**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.**


**APPLICATION NUMBER: 60/536,399** ✓

**FILING DATE: January 14, 2004** ✓

## **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**

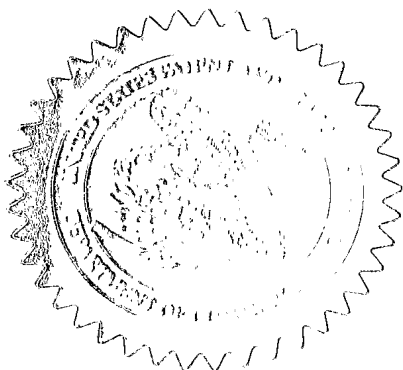

*W. Montgomery*  
**W. MONTGOMERY**  
Certifying Officer

011404

15992 U.S. PTO

Please type a plus sign (+) inside this box → 



PTO/SB/16 (02-01)  
Approved for use through 10/31/2002. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EL998016660US

INVENTOR(S)					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Ulrich Johan	KATSCHER VAN DEN BRINK	NORDERSTEDT, GERMANY DIEL, NETHERLANDS			
<input checked="" type="checkbox"/> Additional inventors are being named on the <u>ONE</u> separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
REGULARIZED VARIABLE DENSITY SENSE					
CORRESPONDENCE ADDRESS					
Direct all correspondence to:					
<input type="checkbox"/> Customer Number				→ 	
OR Type Customer Number here					
<input checked="" type="checkbox"/> Firm or Individual Name		THOMAS E KOCOVSKY, JR			
Address		FAY, SHARPE, FAGAN, MINNICH & McKEE, LLP			
Address		1100 SUPERIOR AVENUE, SEVENTH FLOOR			
City		CLEVELAND	State	OH	ZIP 44114
Country		US	Telephone	216/861-5582	Fax 216/241-1666
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		15	<input type="checkbox"/> CD(s), Number		
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		3	<input type="checkbox"/> Other (specify)		
<input checked="" type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 06-0308					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
FILING FEE AMOUNT (\$) 160					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,  
SIGNATURE

*Robert M. Sieg*

Date

01/14/2004

TYPED or PRINTED NAME

Robert M. SIEG

REGISTRATION NO.  
(if appropriate)

54,446

Docket Number:

PHUS040036USP

TELEPHONE 216. 861-5582

**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

# PROVISIONAL APPLICATION COVER SHEET

Additional Page

PTO/SB/16 (02-01)

Approved for use through 10/31/2002. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Docket Number	PHUS040036USP	Type a plus sign (+) inside this box →	+
INVENTOR(S)/APPLICANT(S)			
Given Name (first and middle [if any])	Family or Surname	Residence (City and either State or Foreign Country)	
Miha	FUDERER	EINDHOVEN, NETHERLANDS	

Number ONE of ONE

**WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

**APPLICATION DATA SHEET**

Mail Stop: Provisional Patent Application  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

**Inventor Information**

Inventor One Given Name::	Ulrich
Family Name::	KATSCHER
City::	Norderstedt
Country::	GERMANY
Inventor Two Given Name::	Johan
Family Name::	VAN DEN BRINK
City::	Diel
Country::	THE NETHERLANDS
Inventor Three Given Name::	Miha
Family Name::	FUDERER
City::	Eindhoven
Country::	THE NETHERLANDS

**Correspondence Information**

Name Line One::	Thomas E. Kocovsky, Esq.
Name Line Two::	FAY, SHARPE, FAGAN,
Name Line Three::	MINNICH & McKEE, LLP
Address Line One::	1100 Superior Avenue, Seventh Floor
City::	Cleveland
State or Province::	OH
Postal or Zip Code::	44114-2518
Telephone One::	(216) 861-5582
Fax::	(216) 241-1666
Electronic Mail::	TKocovsky@faysharpe.com

**Representative Information**

Registration Number:: 28,383

**Application Information**

Title Line One::	REGULARIZED VARIABLE DENSITY SENSE
Total Drawing Sheets::	3
Application Type::	Provisional
Docket Number::	PHUS040036USP (#202785/202963)

"Express Mail" Mailing Label Number EL998016660US

Date of Deposit: JANUARY 14, 2004

I hereby certify that this paper or fee is being deposited  
with the United States Postal Service "Express Mail  
Post Office to Addressee" service under 37 C.F.R. 1.10 on the  
date indicated above and is addressed to: Provisional Patent Application,  
Commissioner For Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

*Hilary M. McNulty*  
By: Hilary M. McNULTY

## REGULARIZED VARIABLE DENSITY SENSE

### Background of the Invention

The following relates to the magnetic resonance arts. It finds particular application in magnetic resonance imaging employing non-Cartesian sampling of k-space, and in magnetic resonance imaging employing variable density sensitivity encoding (SENSE), and will be described with particular reference thereto. However, it also finds application in other magnetic resonance applications such as magnetic resonance spectroscopy.

In the SENSE magnetic resonance imaging technique, a plurality of coils are used to simultaneously acquire magnetic resonance imaging data of a common imaging slice or volume. To acquire imaging data quickly using the SENSE technique, each coil undersamples k-space. The undersampled imaging data acquired by each coil are reconstructed into corresponding folded images of the slice or volume. The folded images are unfolded based on sensitivity characteristics of the coils to produce an unfolded image of the slice or volume. The SENSE imaging technique is described, for example, in Pruessmann et al., Magnetic Resonance in Medicine 42, pp. 952-962 (1999) and in Hajnal et al., U.S. patent no. 6,380,741.

In conventional SENSE imaging, k-space is uniformly sampled. In variable density SENSE, the sampling is not uniform; rather, fewer k-space samples are skipped at or near a center of k-space while more k-space samples are skipped away from the center of k-space. As with conventional SENSE, the undersampled imaging data acquired by each coil is reconstructed into corresponding folded images. The folded images are unfolded using a suitable unfolding algorithm, such as by solving the matrix equation:

$$m(k_y) = S(r_y, k_y) p(r_y) \quad (1),$$

where  $k_y$  indexes the Fourier encoding steps,  $r_y$  indexes unfolded image position,  $m(k_y)$  contains folded image data,  $p(r_y)$  corresponds to the unfolded image, and  $S(r_y, k_y)$

corresponds to a sensitivities matrix that contains the sensitivities of the coils along the column and the corresponding Fourier encoding steps. The unfolded image term  $p$  contains  $N$  true pixel values of the unfolded image. The folded images term  $m$  contains CN/R measured values where  $C$  is the number of coils and  $R$  is a time reduction factor corresponding to the undersampling. Equation (1) is solved for  $p(r_y)$  to compute the unfolded image.

To acquire imaging data quickly using the variable density SENSE technique, the undersampling is increased. However, if the k-space sampling is too sparse, Equation (1) becomes underdetermined or close to singular. This leads to computational difficulties and can produce artifacts in the unfolded image. To address this problem, the unfolding can be regularized using *a priori* knowledge. Regularization depends upon the nature and quality of the *a priori* knowledge. Typically, this additional information is provided by acquiring additional magnetic resonance signal information which is combined with the variable density SENSE data during the unfolding.

In spite of such regularization techniques, the processing of undersampled variable density SENSE imaging data to efficiently produce an unfolded image with reduced artifacts remains a challenging problem. Image quality improvement gained by including the *a priori* knowledge may be offset by longer imaging sessions needed to acquire the *a priori* knowledge. Moreover, subject motion or other changes occurring between acquisition of the *a priori* knowledge content and the variable density SENSE data may cause a spatial misregistration or other mismatch between the *a priori* knowledge and the folded images.

The present invention contemplates an improved apparatus and method that overcomes the aforementioned limitations and others.

### **Brief Summary of the Invention**

According to one aspect, a magnetic resonance imaging method is provided. Variable density sensitivity encoded data is acquired with a higher density at and adjacent a center of k-space and with a lower, undersampled density away from the center of k-space. One or more regularization images are constructed from the higher density portion of the variable density sensitivity encoded data disposed at and adjacent the center of k-space. The variable density sensitivity encoded data are reconstructed

into an unfolded reconstructed image. The reconstructing includes: reconstructing the higher and lower density variable density sensitivity encoded data into a plurality of folded images; and unfolding the folded images to form the unfolded image using the one or more regularization images.

5           According to another aspect, a magnetic resonance imaging apparatus is disclosed. A plurality of radio frequency coils acquire variable density sensitivity encoded data that is undersampled at least away from the center of k-space. A reconstruction processor for each coil reconstructs: a regularization image reconstructed from a higher density portion of the variable density sensitivity encoded  
10 data disposed at or near a center of k-space acquired by that coil; and a folded image reconstructed from the variable density sensitivity encoded data acquired by that coil. An unfolding processor unfolds the folded images. The unfolding is regularized by the regularization images.

One advantage resides in reconstructing undersampled variable density  
15 SENSE imaging data with improved speed.

Another advantage resides in reconstructing undersampled variable density SENSE imaging data with minimal artifacts.

Yet another advantage resides in an ability to process undersampled variable density SENSE imaging data acquired with a variety of k-space sampling  
20 trajectories such as radial or spiral sampling.

Numerous additional advantages and benefits will become apparent to those of ordinary skill in the art upon reading the following detailed description of the preferred embodiments.

### **Brief Description of the Drawings**

25           The invention may take form in various components and arrangements of components, and in various process operations and arrangements of process operations. The drawings are only for the purpose of illustrating preferred embodiments and are not to be construed as limiting the invention.

FIGURE 1 diagrammatically shows a magnetic resonance imaging  
30 system implementing the variable density SENSE magnetic resonance imaging described herein. In FIGURE 1, the magnetic resonance imaging scanner is illustrated with about one-half of the scanner cut away to reveal internal components of the

scanner and to reveal an associated imaging subject and SENSE coil array disposed in the scanner bore.

FIGURE 2 plots an example k-space sampling density profile for variable density SENSE imaging.

5           FIGURE 3 diagrammatically shows radial k-space sampling trajectories for variable density SENSE imaging.

FIGURE 4 diagrammatically shows a spiral k-space trajectory for variable density SENSE imaging.

#### **Detailed Description of the Preferred Embodiments**

10           With reference to FIGURE 1, a magnetic resonance imaging scanner 10 includes a housing 12 defining a generally cylindrical scanner bore 14 inside of which an associated imaging subject 16 is disposed. Main magnetic field coils 20 are disposed inside the housing 12. The main magnetic field coils 20 are arranged in a generally solenoidal configuration to produce a main  $B_0$  magnetic field directed along a central axis 22 of the scanner bore 14. The main magnetic field coils 20 are typically  
15           superconducting coils disposed inside in cryoshrouding 24, although resistive main magnets can also be used. Moreover, the scanner 10 may include additional access openings other than the ends of the cylindrical scanner bore 14 for accessing the imaging subject 16. For example, rather than a closed solenoidal configuration having a closed generally "O"-shaped cross-section, a more open generally "U"-shaped  
20           cross-sectional magnet can be employed.

          The housing 12 also houses or supports magnetic field gradient coils 30 for selectively producing magnetic field gradients parallel to the central axis 22 of the bore 14, along in-plane directions transverse to the central axis 22, or along other selected directions. Optionally, the housing 12 further houses or supports a birdcage  
25           radio frequency body coil 32 for selectively exciting and/or detecting magnetic resonances. A sensitivity encoding (SENSE) coil array 34 disposed inside the bore 14 includes a plurality of SENSE coils, specifically four SENSE coils in the example coil array 34, although other numbers of coils can be used. The coils of the coil array 34 have different sensitivities to the magnetic resonance signal, thus enabling SENSE  
30           encoding. In one embodiment, the coil array 34 is an array of surface coils disposed close to the imaging subject 16. Rather than a coil array, other radio frequency



antennae that have a suitable spatial sensitivity profile can be used for acquiring the SENSE data, such as antennae defined by porting the received radio frequency signal from a plurality of spatially separated ports of a radio frequency coil.

5 The SENSE coil array 34 can be used for receiving magnetic resonances that are excited by the optional birdcage or other whole body coil 32, or the magnetic resonances can be both excited and received by the SENSE coil array 34. The housing 12 typically includes a cosmetic inner liner 36 defining the scanner bore 14.

10 The main magnetic field coils 20 produce a main magnetic field  $B_0$ . A magnetic resonance imaging controller 40 operates magnet controllers 42 to selectively energize the magnetic field gradient coils 30, and operates a radio frequency transmitter 44 coupled to the radio frequency coil 32 as shown, or coupled to the SENSE coil array 34, to selectively energize the radio frequency coil or coil array 32, 34. By selectively operating the magnetic field gradient coils 30 and the radio frequency coil or coil array 32, 34 magnetic resonance is generated and spatially encoded in at least a portion of a  
15 selected region of interest of the imaging subject 16. By applying selected magnetic field gradients via the gradient coils 30, a selected k-space trajectory is traversed, such as a Cartesian trajectory, a plurality of radial trajectories, or a spiral trajectory. During traversal of the selected k-space trajectory, the magnetic resonance imaging controller 40 operates a radio frequency receiver 46 coupled to the SENSE coil array 34 to read  
20 out k-space samples using the coils of the SENSE coil array 34. The k-space samples are stored in a k-space memory 50.

The stored k-space samples are sorted by the receive coil of the array which received each sample. The k-space sampling is variable, with higher density k-space sampling at or near a center of k-space, and an undersampled lower density  
25 k-space sampling away from the center of k-space. A reconstruction processor 52 reconstructs the undersampled k-space data spanning all of k-space acquired by each coil into corresponding folded images that are stored in a folded images memory or buffer 60. Additionally, the portion of k-space at or near k-space center acquired by each coil at a higher sampling density is reconstructed by the reconstruction processor  
30 52 into corresponding low resolution regularization images that are stored in a regularization images memory or buffer 62.

An unfolding processor 66 unfolds the folded images 60 using an unfolding algorithm that is regularized by the regularization images 62. In one suitable approach, the folded images 60 are unfolded by minimizing an error parameter  $\delta$ :

$$\delta^2 = \|m(k_y) - S(r_y, k_y) p(r_y)\|^2 + q^2 \|I_{reg}(r_y) - p(r_y)\|^2 \quad (2),$$

where  $k_y$  indexes the Fourier encoding steps,  $r_y$  corresponds to the image position at index  $y$ ,  $m(k_y)$  corresponds to the folded images,  $p(r_y)$  corresponds to the unfolded image,  $S(r_y, k_y)$  corresponds to a sensitivities matrix that contains the sensitivities of the coils along the column and the corresponding Fourier encoding steps, and  $I_{reg}(r_y)$  corresponds to a regularization image constructed from low resolution images stored in the regularization images memory 62. The unfolded image term  $p$  contains  $N$  true pixel values of the unfolded image. The folded images term  $m$  contains  $CN/R$  measured values where  $C$  is the number of coils and  $R$  is a time reduction factor corresponding to the undersampling.

In one embodiment, the regularization image  $I_{reg}(r_y)$  is constructed by combining the low resolution regularization images acquired by the various receive coils. The low resolution regularization images can be combined using a sum-of-squares process to produce a composite image. In another embodiment, a single low resolution regularization image acquired by one of the receive coils is used as the regularization image. In this embodiment, the selected image was preferably acquired by a receive coil that has a largely uniform sensitivity over the field of view.

The operator  $\|x\|$  in Equation (2) denotes the Euclidean norm of  $x$ . Equation (2) includes unfolding term  $\|m(k_y) - S(r_y, k_y) p(r_y)\|^2$  that is indicative of fidelity of the unfolded image to the folded images, and regularization term  $\|I_{reg}(r_y) - p(r_y)\|^2$  that is indicative of fidelity of the unfolded image to the one or more regularization images 62. The parameter  $q$  is a regularization weighting parameter determining the relative influences of the unfolding term and the regularization term. It will be recognized that if  $q=0$  then unregularized Equation (1) is recovered.

In one approach for evaluating Equation (2) to obtain the unfolded image, the unfolding processor 66 minimizes Equation (2) with respect to the unfolded image term  $p(r_y)$ . This minimization is preferably done analytically according to:

$$p = I_{\text{reg}} + S^H (SS^H + q^2)^{-1} (m - SI_{\text{reg}}) \quad (3),$$

where the superscript "H" denotes the transposed complex conjugate of S, the functional dependencies on  $k_y$  and  $r_y$  indicated in Equation (2) have been omitted. Equation (3) can be further optimized with respect to the regularization weighting parameter  $q$ , for example by performing a least squares minimization of the image term  $p$  of Equation (3) with respect to regularization weighting parameter  $q$ .

The unfolded image is stored in an image memory 70, and can be displayed on a user interface 72, stored in non-volatile memory, transmitted over a local intranet or the Internet, viewed, stored, manipulated, or so forth. The user interface 72 can also enable a radiologist, technician, or other operator of the magnetic resonance imaging scanner 10 to communicate with the magnetic resonance imaging controller 40 to select, modify, and execute magnetic resonance imaging sequences.

With reference to FIGURE 2, a suitable variable density SENSE k-space sampling profile 80 for each coil is illustrated. The sampling density 80 includes a higher-density portion 82 disposed at or near k-space center which is constant and is not undersampled. This not undersampled higher density k-space portion 82 is reconstructed into a regularization image that includes no folding. Due to the limited k-space range of the k-space portion 82, the resulting regularization images 62 are low resolution images of the field of view.

The k-space sampling profile 80 also includes undersampled portions 84, 86 disposed away from k-space center and extending to  $-k_{\text{max}}$  and  $k_{\text{max}}$ , respectively. In one embodiment, the not undersampled k-space portion 82 spans about one-eighth of the k-space range  $[-k_{\text{max}}, k_{\text{max}}]$  of the variable density SENSE sampling profile 80. This one-eighth ratio provides good regularization images while still providing a substantial improvement in data acquisition speed. However, other ratios between the central, not undersampled k-space portion 80 and the total k-space range  $[-k_{\text{max}}, k_{\text{max}}]$  of the SENSE sampling profile 80 are also suitable. The portion 82 is at least not undersampled, and is optionally oversampled to provide redundant data. Moreover, if oversampling of the portion 82 is performed, the oversampling optionally includes a non-constant sampling density over some or all of the portion 82.

The k-space sampling profile 80 includes a generally Gaussian sampling density transition between the not undersampled central k-space portion 82 and each of the undersampled outer portions 84, 86. Other sampling density transitions can also be used, however, such as a linear transition indicated in FIGURE 2 by dashed lines.

5 In the above-described embodiment, a Cartesian k-space sampling trajectory is used, in which phase-encoded lines are read out, and the central (near  $k=0$ ) lines are fully sampled and the more peripheral phase encoding lines are spaced apart in accordance with the selected variable density SENSE undersampling. In another embodiment, two-dimensional SENSE is used, in which the second dimension is  
10 typically transverse to the x-y plane. In yet another embodiment, a Cartesian k-space sampling trajectory is used, but the variable density SENSE undersampling is performed in the readout direction rather than in the phase encoding direction. In this embodiment, the parameters  $k_y$  and  $r_y$  in Equation (2) are suitably replaced by  $k_x$  and  $r_x$  corresponding to the readout direction. In yet another Cartesian k-space sampling  
15 trajectory, SENSE undersampling is performed in both the phase encode and readout directions.

With reference to FIGURE 3, in another embodiment radial sampling trajectories 90 are employed. The radial sampling trajectories 90 converge at or near the center of k-space. This geometry of the radial sampling trajectories 90 provides a  
20 higher sampling density region 92 near the center of k-space center due to the convergence of the radial sampling trajectories 90. The higher sampling density region 92 is preferably oversampled or at least not undersampled for each coil, and the higher sampling density region 92 of the imaging data acquired by each coil is suitably reconstructed to form the regularization images 62. While FIGURE 3 shows planar radial sampling trajectories 90, it is also contemplated to employ radial sampling  
25 trajectories three-dimensionally, spanning a hemispherical or full spherical solid angle.

With reference to FIGURE 4, in yet another embodiment a spiral sampling trajectory 96 that spirals away from or into k-space center is employed. The illustrated spiral trajectory 96 preferably has a constant pitch  $P$ ; however, an expanding  
30 or contracting pitch that changes with distance away from k-space center can also be used. The spiral can be in two or three dimensions. In three dimensions, it can spiral continuously, lie on the surface of concentric spheres, or the like. Also, the spiral can include a plurality of linear segments defining a generally square spiral, hexagonal

spiral, dodecagonal spiral, or the like. The constant or increasing spiral pitch geometry provides a higher sampling density region 98 in the vicinity of k-space center. The higher sampling density region 98 is oversampled or at least not undersampled for each coil, and the higher sampling density region 98 of the imaging data acquired by each  
5 coil is suitably reconstructed to form the regularization images 62. Other sampling schemes with higher central k-space sampling densities are also contemplated.

The invention has been described with reference to the preferred embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the  
10 invention be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

Claims

Having described the preferred embodiments, the invention is now claimed to be:

1. A magnetic resonance imaging method comprising:

acquiring variable density sensitivity encoded data with a higher density at and adjacent a center of k-space and with a lower, undersampled density away from the center of k-space;

constructing one or more regularization images from the higher density portion of the variable density sensitivity encoded data disposed at and adjacent the center of k-space; and

reconstructing the variable density sensitivity encoded data into an unfolded reconstructed image, the reconstructing including:

reconstructing the higher and lower density variable density sensitivity encoded data into a plurality of folded images, and

unfolding the folded images to form the unfolded image using the one or more regularization images.

2. The magnetic resonance imaging method as set forth in claim 1, wherein the plurality of folded images are each acquired by a corresponding antenna of a plurality of antennae, and the constructing of one or more regularization images includes:

reconstructing a low resolution image from the higher density portion of the variable density sensitivity encoded data acquired by each antenna; and

combining the reconstructed low resolution images to obtain the regularization image used in the unfolding.

3. The magnetic resonance imaging method as set forth in claim 2, wherein the higher density portion of the variable density sensitivity encoded data acquired by each antenna is not undersampled.

4. The magnetic resonance imaging method as set forth in claim 3, wherein the higher density portion of the variable density sensitivity encoded data spans about one-eighth of a k-space range of the variable density sensitivity encoded data.

5. The magnetic resonance imaging method as set forth in claim 2, wherein the higher density portion of the variable density sensitivity encoded data acquired by each antenna is oversampled and contains redundant data.

6. The magnetic resonance imaging method as set forth in claim 1, wherein the sensitivity encoded image unfolding includes:

optimizing a penalty function including a weighted combination of:

an unfolding term indicative of fidelity of the unfolded image to the folded images, and

a regularization term indicative of fidelity of the unfolded image to the regularization images.

7. The magnetic resonance imaging method as set forth in claim 1, wherein the acquiring of variable density sensitivity encoded data includes:

acquiring the higher density portion disposed at or near the center of k-space with a uniform k-space sampling density that is not undersampled; and

acquiring undersampled k-space data away from the center of k-space using a k-space sampling density that decreases smoothly with distance away from the higher density portion.

8. The magnetic resonance imaging method as set forth in claim 7, wherein the sampling density transition between the higher density portion and the undersampled k-space data away from the center of k-space has one of a linear and a Gaussian shape.

9. The magnetic resonance imaging method as set forth in claim 1, wherein the acquiring of variable density sensitivity encoded data includes:

acquiring variable density sensitivity encoded data using a non-Cartesian trajectory, the higher density portion of the variable density sensitivity encoded data being defined by a geometry of the non-Cartesian trajectory.

10. The magnetic resonance imaging method as set forth in claim 9, wherein the acquiring of variable density sensitivity encoded data using a non-Cartesian trajectory includes:

acquiring a plurality of radial k-space sampling trajectories, the higher density portion of the variable density sensitivity encoded data being defined by a convergence of the plurality of radial k-space sampling trajectories at or near the center of k-space.

11. The magnetic resonance imaging method as set forth in claim 9, wherein the acquiring of variable density sensitivity encoded data using a non-Cartesian trajectory includes:

acquiring a spiral k-space sampling trajectory, the higher density portion of the variable density sensitivity encoded data being defined by a center region of the spiral k-space sampling trajectory.

12. The magnetic resonance imaging method as set forth in claim 11, wherein the spiral k-space sampling trajectory has one of a uniform spiral pitch and an expanding spiral pitch that increases with distance away from k-space center.

13. The magnetic resonance imaging method as set forth in claim 9, wherein the constructing of one or more regularization images includes:

reconstructing a plurality of low resolution images corresponding to radio frequency antennae used in the acquiring from the higher density portion of the variable density sensitivity encoded data, the regularization image used in the unfolding being constructed from the reconstructed low resolution images.

14. The magnetic resonance imaging method as set forth in claim 9, wherein the higher density portion of the variable density sensitivity encoded data is not undersampled.

15. A magnetic resonance imaging apparatus comprising:

a main magnet (20);

magnetic field gradient coils (30);

a plurality of radio frequency receive coils (34); and



a processor (52, 66) that performs the magnetic resonance imaging method of claim 1.

16. A magnetic resonance imaging apparatus comprising:

a plurality of radio frequency coils (34) acquiring variable density sensitivity encoded data that is undersampled at least away from the center of k-space;

a reconstruction processor (52) that for each coil reconstructs:

a regularization image reconstructed from a higher density portion of the variable density sensitivity encoded data disposed at or near a center of k-space acquired by that coil, and

a folded image reconstructed from the variable density sensitivity encoded data acquired by that coil; and

an unfolding processor (66) that unfolds the folded images, the unfolding being regularized by the regularization images.

17. The magnetic resonance imaging apparatus as set forth in claim 16, further including:

magnetic field gradient coils (30) producing a non-Cartesian k-space sampling trajectory during the acquiring of the variable density sensitivity encoded data, the non-Cartesian k-space trajectory having a geometry defining the higher density portion of the variable density sensitivity encoded data.

18. The magnetic resonance imaging apparatus as set forth in claim 16, further including:

magnetic field gradient coils (30) producing one of:

a plurality of radial k-space sampling trajectories, and

a spiral k-space sampling trajectory,

during the acquiring of the variable density sensitivity encoded data.

19. The magnetic resonance imaging apparatus as set forth in claim 16, wherein the unfolding processor (66) optimizes a penalty function including a weighted combination of:

an unfolding term indicative of fidelity of the unfolded image to the folded images, and

a regularization term indicative of fidelity of the unfolded image to the regularization images.

20. The magnetic resonance imaging apparatus as set forth in claim 16, wherein the plurality of radio frequency coils (34) acquire:

the higher density portion disposed at or near the center of k-space with a uniform k-space sampling density that is not undersampled, and


undersampled k-space data away from the center of k-space using a k-space sampling density that decreases smoothly with distance away from the higher density portion.

## **REGULARIZED VARIABLE DENSITY SENSE**

### **Abstract of the Disclosure**

A magnetic resonance imaging apparatus includes a plurality of radio frequency coils (34) that acquire variable density sensitivity encoded data that is undersampled at least away from the center of k-space. A reconstruction processor (52) for each coil reconstructs: a regularization image reconstructed from a higher density portion of the variable density sensitivity encoded data disposed at or near a center of k-space acquired by that coil; and a folded image reconstructed from the variable density sensitivity encoded data acquired by that coil. An unfolding processor (66) unfolds the folded images. The unfolding is regularized by the regularization images.

1 / 3

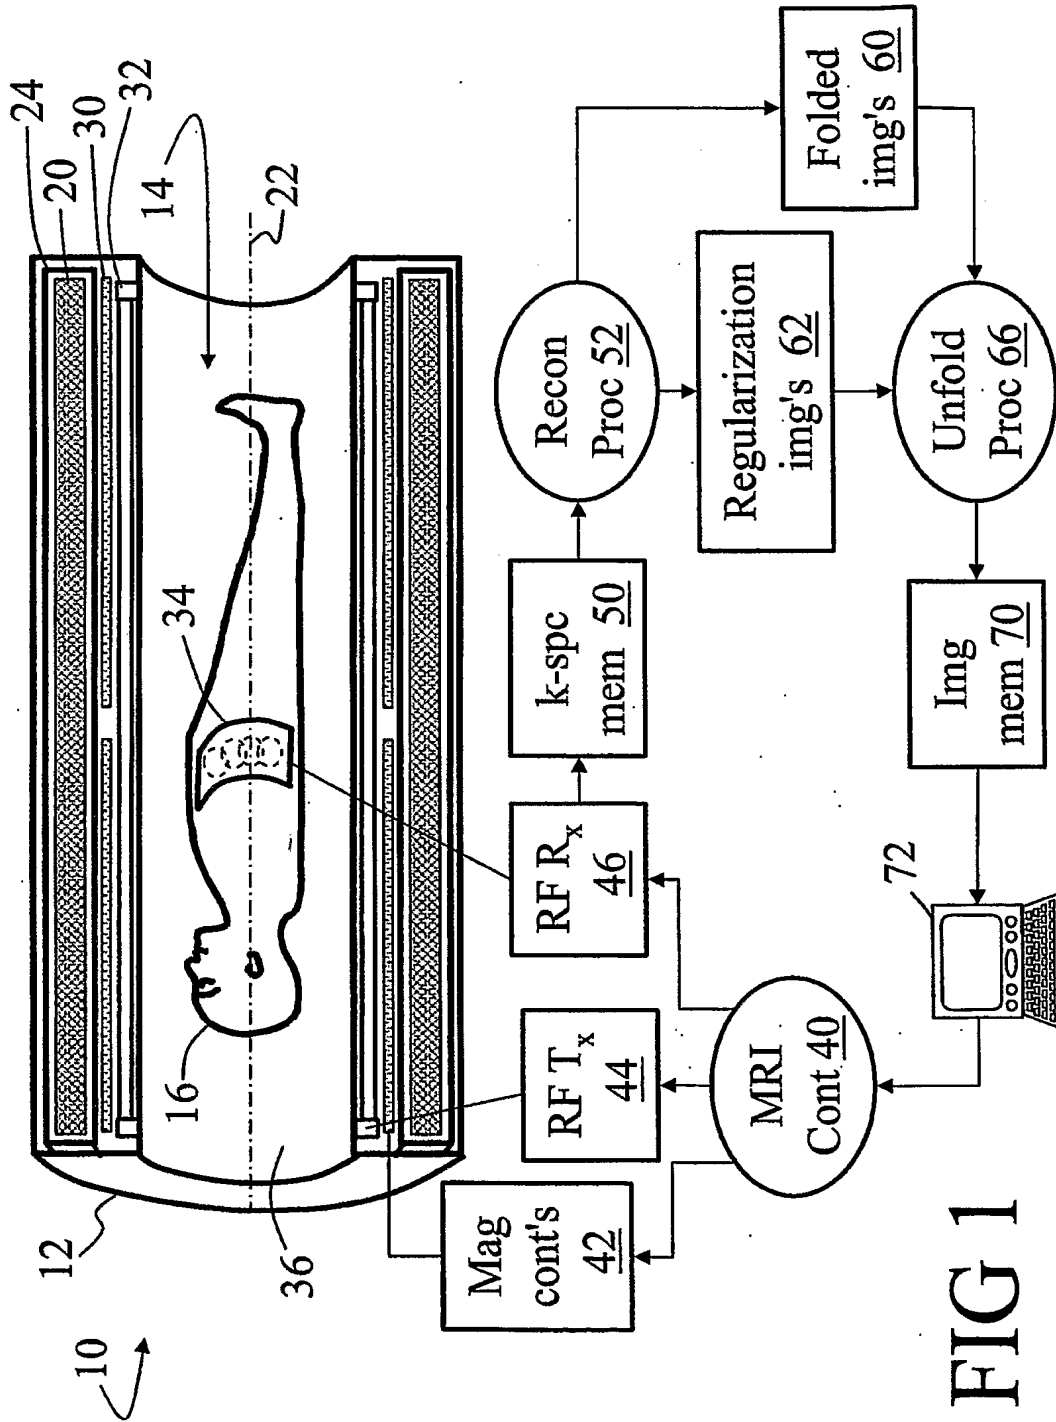

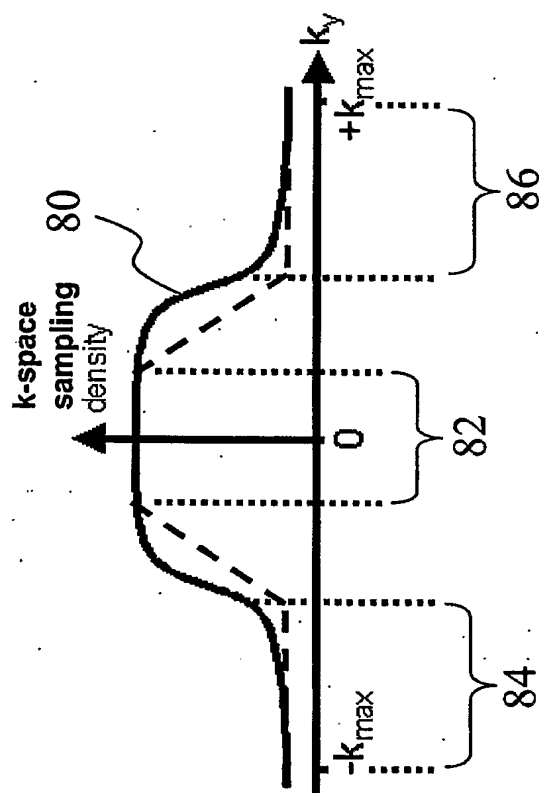


FIG 2

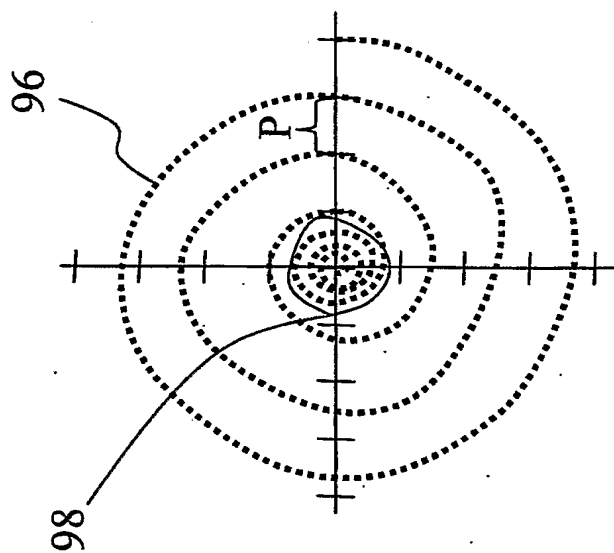


FIG 4

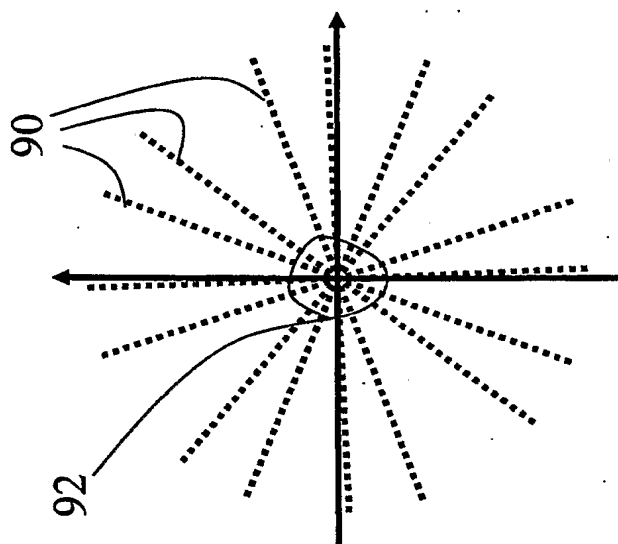


FIG 3